


Configuration Tool II Release Notes

VERSION 4.1.1.0 (18/01/16)

- **Digitally signed release** to provide assurance that the software has not been altered since it was published by Tekron.

VERSION 4.1.0.24 (22/12/15)

- **Feature:** Added support for configuring the NTS100 Time Server.
- **Feature:** Added configurable delays for antenna and power alarms on TCG clocks. The activation of the antenna failure and power supply failure alarms can now be delayed by a user defined time period from 0 to 25.5 seconds, specified in tenths of a second.

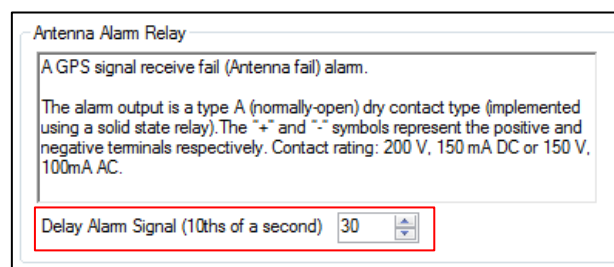

- **Improvement:** When the PTP Forced Slave option is selected, the 'Advertised delay interval' setting is now hidden, as this setting has no effect when the clock is a PTP slave.
- **Improvement:** When the PTP Forced Slave option is selected, the 'Announce interval' setting is renamed to 'Master announce interval', to indicate that this setting should be set to match the announce interval of the PTP master clock. The master announce interval determines how often announce messages are expected to be seen from the master clock, and allows the clock to determine when the master is no longer announcing. If the master announce interval is set lower than the actual announce interval, the slave clock will not synchronize to the master. If set higher than the actual announce interval, there will be an unnecessary delay before the slave clock switches to an alternate time source.
- **Bug Fix:** Antenna alarm relay no longer appears on the I/O tab when connected to a TCG with legacy D1 hardware. The D1 hardware does not include an antenna alarm relay.
- **Bug Fix:** The Link Local address radio button on the Network – Basic tab is now hidden when it is not selected and the configuration is stored.
- **Bug Fix:** ToolTip pop-up help text has been corrected for the IRIG-B stream configuration options.
- **Bug Fix:** Updated Test Source dialog box text and ToolTip pop-up help text to match the behaviour of the Test Source in firmware versions 3.13r and later. It is no longer necessary to ensure that all other time sources are disabled, as the test source now overrides any other active time sources.

VERSION 4.1.0.22 (Limited Release)

- **Feature:** Added support for configuring the P3 output port on the NTS 02-E and NTS 03-E time servers. The NTS must be running firmware 3.18r or later to support configuration of the P3 output port.
- **Improvement:** An error notification is now shown if attempting to store a configuration with the invalid IPv4 address of 0.0.0.0 to the clock.
- **Bug Fix:** Fixed a bug that could cause the Reload, Save, Load and Print buttons to be incorrectly disabled when logged in as a user with access restricted to show only one tab.
- **Bug Fix:** Reset GPS button no longer appears when connected to a non-admin port. Previously, the Reset GPS button appeared when connected to a non-admin port and had no effect when clicked.
- **Bug Fix:** The Log to File checkbox on the GPS/GNSS statistics page now remains checked when the Reload button is clicked while logging is in progress. Previously, clicking the Reload button while statistics logging is in progress would result in the Log to File checkbox becoming unchecked, but the logging would continue.
- **Bug Fix:** Improved USB connection recovery following a loss of connection. Previously, the configuration tool could be unable to discover a clock connected via USB after a connection loss, such as in the case of a cancelled password change during login.
- **Bug Fix:** The configuration tool no longer loses the connection to the clock when an invalid license key is entered on the Maintenance tab.
- **Bug Fix:** The text for the P2 input and P3 output on the I/O tab when connected to an NTS 02-E or NTS 03-E now refers to C37.118.1 instead of IEEE 1344.
- **Bug Fix:** Fixed bug that could cause network information to be incorrectly hidden when a user is logged in via an admin port, but correctly shown when logged in via a non-admin port, when that user is allowed access to system information, but denied access to network, NTP, PTP, security and notifications settings. Network information is now shown consistently across all ports.

VERSION 4.1.0.21 (Limited Release)


- **Improvement:** PTP profile names have been changed to be more specific. The 'Power' profile button is now labelled 'C37.238' and the 'Telecom' profile button is now labelled 'G8265.1'.
- **Bug Fix:** Fixed the invalid default file name given when saving a GPS log file while connected to a non-admin port. The default file name previously contained a forward slash character, which would result in an invalid file name error if saved without editing it.

VERSION 4.1.0.19 (Limited Release)

- **Improvement:** The clock configuration printout now represents the current configuration in the tool rather than the configuration stored in the clock. The printout will contain a warning message if the printed configuration does not match the configuration stored in the clock, or if the printout was printed while in offline mode.
- **Bug Fix:** The configuration tool now uses the IP address from the packet header instead of the IP address from the clock settings when communicating with a legacy clock. This fixes an issue that could cause the configuration tool to be unable to connect to a legacy clock that is behind a NAT router.
- **Bug Fix:** Added missing setting names to clock configuration printouts.

VERSION 4.1.0.18 (Limited Release)


- **Improvement:** An “Are you sure?” confirmation dialog is now displayed when clearing existing GPS/GNSS statistics.
- **Improvement:** A command-line option has been added to allow a saved clock list to be automatically loaded when launching the configuration tool. Appending the file name of a saved clock list to a shortcut used to launch the configuration tool will cause that list to be loaded automatically.

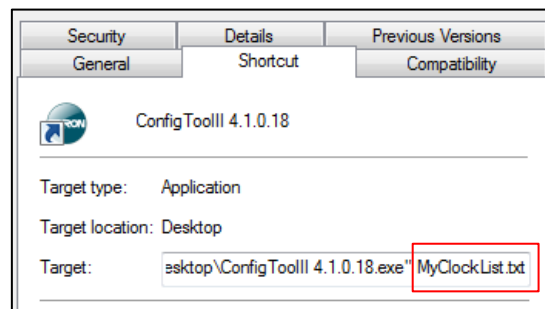


- **Improvement:** The layout of the PTP TLV Config page when connected to a legacy clock has been changed to use the same layout as used for non-legacy clocks.
- **Bug Fix:** Serial Parity and Baud options no longer appear when connected to a legacy D1 hardware clock. D1 hardware clocks do not have configurable parity or baud rate.
- **Bug Fix:** Power alarms are no longer indicated when connected to a legacy D1 hardware clock. Unlike newer hardware, D1 hardware does not support the detection of power supply failure when equipped with dual power supplies.
- **Bug Fix:** The “Don’t allow username in password” system policy setting now prevents a prefix of the username over 3 characters long from being used anywhere in the password. Previously, this setting only prevented the complete username from being used in the password.
- **Bug Fix:** Fixed a bug that caused the User and Access Control tabs to not appear when configuring a TCG 01-G or TCG 02-G in offline mode, which prevented the setup of user accounts.

VERSION 4.1.0.17 (Limited Release)

- **Improvement:** The clock source priority settings are now a list that can be reordered by dragging and dropping. An 'Override Quality' checkbox has been added which, when selected, will force the chosen priorities to take effect instead of the default behaviour. The default behaviour is to use the clock source with the best accuracy, and only use the configured priorities when multiple clock sources have the same accuracy.
- **Improvement:** The PTP clock source is now blocked from being set above the lowest priority when the PTP Forced Slave option is not set, as this is an invalid setting. The clock source cannot switch to PTP from another valid sync source when Forced Slave is not set, because all PTP ports are acting as PTP masters and therefore cannot be PTP slaves, as a port cannot be a master and a slave simultaneously. A message dialog appears if setting the PTP source above the lowest priority is attempted.
- **Improvement:** An incoming data indicator has been added to the GPS/GNSS Live Satellite Visibility display. This indicator flashes green when live satellite data is being received from the clock, flashes yellow when the GPS/GNSS receiver has been reset, and flashes red if there is a problem with the data.

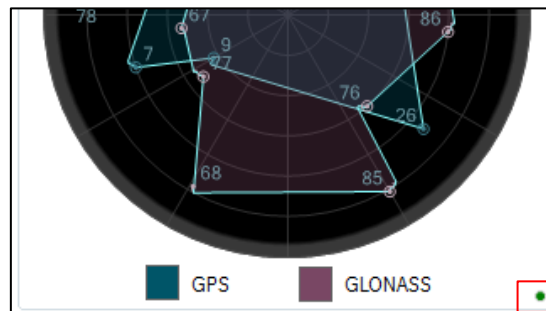

- **Improvement:** The number of channels supported by the GPS/GNSS receiver is now shown on the GPS/GNSS tab.

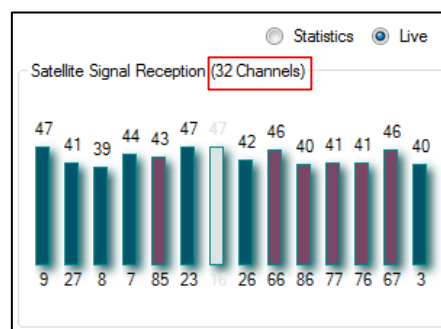

VERSION 4.1.0.15 (Limited Release)

- **Improvement:** A pop-up message dialog will now appear when manually adding an IP address to the configuration tool to confirm that it is working, and a pop-up dialog will also appear if the configuration tool cannot contact a clock at the given address.
- **Improvement:** The configuration tool now gives clearer warnings when test mode is in use. On the Clock tab, the configuration tool now shows a “Sync Forced” alarm when the “Sync relay is always on” setting is selected, and a “Test Source In Use” message when the test source is active.
- **Bug Fix:** The configuration tool can now correctly configure the TTL A output of the TTM 01-E. Previously, storing changes to the configuration of the TTL A output could fail without generating an error message.
- **Bug Fix:** The Telecom profile quick set button now correctly resets the TLV Config settings. Previously, the TLV Config settings were not reset to the default values when the Telecom profile was selected.
- **Bug Fix:** Fixed bug that could cause the Clock tab to not appear when logged in as a user with access to Information settings but limited access to other settings. A user with access to Information settings is permitted to view the System Information, which appears on the Clock tab.

VERSION 4.1.0.13 (Limited Release)

- **Bug Fix:** The PTP announce interval setting is now shown when the clock is a Forced Slave. The configured announce interval determines the foreign master timeout, which determines how often a slave clock must see announce messages in order to recognise a master as valid.
- **Bug Fix:** The GPS tab and the Enable GPS checkbox no longer appear when configuring a Fibre Slave clock. Fibre Slave clocks are not equipped with a GPS receiver.

VERSION 4.1.0.12 (Limited Release)


- **Bug Fix:** Improved stability of configuration tool when running on Windows XP and on systems with low memory.

VERSION 4.1.0.11 (Limited Release)

- **Improvement:** The configuration tool will now display the current TAI -> UTC offset in Offline mode, based on the current date and time and an internal table of leap second additions, and will also display the date of the last leap second addition.
- **Improvement:** Saved configuration files now include the TAI -> UTC offset used by the clock, the UTC time at the clock, and the local time at the PC. This information is for reference only and is shown but not loaded when the configuration file is loaded by the configuration tool.

VERSION 4.1.0.9 (Limited Release)

- **Feature:** Added support for configuring the PRPTP Translator.
- **Improvement:** The GPS/GNSS receiver firmware version is now shown under System Information on the Clock tab.

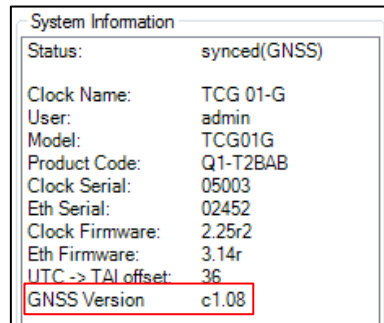


System Information	
Status:	synced(GNSS)
Clock Name:	TCG 01-G
User:	admin
Model:	TCG01G
Product Code:	Q1-T2BAB
Clock Serial:	05003
Eth Serial:	02452
Clock Firmware:	2.25r2
Eth Firmware:	3.14r
UTC -> TAI offset:	36
GNSS Version	c1.08

- **Improvement:** Added support for extended holdover time on legacy TCG clocks.
- **Bug Fix:** PTP Forced Slave is now correctly always selected for the PTP Translator and PRPTP.
- **Bug Fix:** When the IP address of a clock is changed, the IP address shown in the Discovery window will now update to the new address automatically. Previously, the Discovery window would not update until the clock is rediscovered.
- **Bug Fix:** Fixed a bug that prevented the local time from being set to be behind UTC on legacy clocks. Negative UTC offsets were treated as positive, resulting in the local time being ahead of UTC instead of behind.
- **Bug Fix:** Fixed a bug that could cause the links for adding users and groups to appear when the user does not have sufficient access to create users or groups. Attempting to add a user or group in this case did not have any effect on the connected clock.
- **Bug Fix:** Fixed a bug that could cause the configuration tool to crash when deleting a new user that hasn't yet been saved.
- **Bug Fix:** Location and satellite data on the GPS/GNSS tab is now correctly cleared when the GPS/GNSS receiver is reset using the Reset GPS/GNSS button.
- **Bug Fix:** A warning dialog is now displayed if the logged in user has no access to any settings as set on the Access Control tab. Previously, the user would be shown a blank configuration window in this case.
- **Bug Fix:** The 'Store configuration to clock' button is now correctly disabled when the configuration has not been changed. Previously, the button was left enabled if an output setting was changed, then set back to the previous setting.
- **Bug Fix:** The descriptions for serial strings String-C and String-E have been updated to match the output of the clock. These descriptions stated the location of the on-time point incorrectly.

VERSION 4.1.0.6 (Limited Release)

- **Improvement:** The current UTC -> TAI offset is now shown under System Information on the Clock tab.

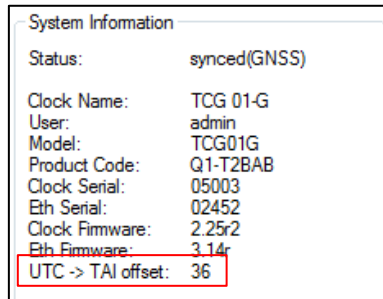

- **Improvement:** Added support for enhanced clock status reporting from legacy clocks. The configuration tool will now correctly indicate whether the connected clock is in holdover. Previously, the configuration tool indicated non-holdover when the connected legacy clock was in holdover.
- **Improvement:** Both passwords are now set in one dialog when changing passwords on a clock with two-password authentication enabled.
- **Improvement:** A confirmation dialog is now shown when refreshing the configuration window will cause unsaved changes to be lost. Previously, no warning was given.
- **Bug Fix:** Leading and trailing white space is no longer trimmed from login usernames and passwords. Previously, this could cause a user to be unable to log in if they were to set a password containing leading or trailing white space.
- **Bug Fix:** Fixed a bug that caused notification subscriptions to not appear on the Network – Notifications tab when configuring a non-admin port while connected to an admin port.

VERSION 4.1.0.5 (Limited Release)

- **Bug Fix:** Fixed a bug that caused the configuration tool to crash when saving a configuration with the serial string output configured for a 9 data bit format.

VERSION 4.1.0.4 (Limited Release)

- **Feature:** Added String-H option to Serial String options on clocks that support it.
- **Bug Fix:** The clock firmware version for legacy TCG clocks running D or E firmware versions now appears as unknown, rather than as an invalid version number.
- **Bug Fix:** The supervisor mode option no longer appears when the clock is in insecure mode.

VERSION 4.1.0.3 (26/03/15)

- **Feature:** Added support for configuring TCG 01-G and TCG 02-G P4 (Serial port) to provide a 9-bit serial output. The 9 bit serial string consists of 8 data bits and a parity bit. The old 8 bit serial strings are still supported.

Configuration Option	No. Data Bits	Parity	No. Stop Bits
8-O-1 (New)	8	Odd	1
8-E-1 (New)	8	Even	1
8-N-1	8	None	1
7-O-1	7	Odd	1
7-E-1	7	Even	1

- **Feature:** The editor window title now includes the clock model number if the clock designation is not set.
- **Improvement:** Unnecessary constraint checks performed when entering test mode have been removed. Test mode previously required that the clock had not been synchronised to a time source since being powered on.
- **Bug Fix:** Change to discovery requests to ensure that legacy clocks are correctly discovered. Legacy clocks running Ethernet firmware prior to 2.039 send every alternate packet as a broadcast. The tool now sends two discovery requests to ensure that the clock responds with both unicast and broadcast messages.

VERSION 4.1.0.2 (Limited Release)

VERSION 4.1.0.1(Limited Release)

- **Bug Fix:** Fixed bug introduced in version 4.1.0.0 which caused the configuration tool to be unable to communicate with the clock via USB.
- **Bug Fix:** When changing a user password, the name of the user whose password is being changed is now displayed instead of the currently logged in user.

Major Release - VERSION 4.1.0.0 (04/03/15)

This release has many new features including:

- **Feature:** Offline Mode capabilities added to tool. It is now possible to edit and save a configuration file without connecting to a clock. The saved configuration can be loaded and stored to a clock at a later date.
- **Feature:** Legacy clock compatibility added to tool. The configuration tool will now discover and configure clocks running legacy Ethernet firmware versions 2.xx and 1.xx. For example TCG 01-E, TCG 02-E and TTM 01-E can now be configured.
- **Feature:** GNSS Commissioning added. It is now possible to view and log satellite statistics to determine the suitability of the antenna position.
- **Feature:** Added encryption and password protection to saved configurations. Configuration files saved with earlier configuration tool versions are still supported.

- **Feature:** Source priority selection added to tool. It is now possible to configure the order in which time sources will be used for synchronisation, for clocks which support multiple time sources. The default setting is to use GNSS/GPS, then PTP, then IRIG-B, then NTP.
- **Feature:** Configuration printout has been reformatted to improve readability.
- **Feature:** Configuration tool now uses background communication with clock to improve the responsiveness of the user interface.
- **Feature:** Added ability to restrict configuration access to only admin ports. When the 'Admin port access only' option is selected, the clock can only be configured through the 'admin' Ethernet port. Non-admin ports still operate as time servers and can be configured from the admin port.
- **Feature:** Increased range of options for PTP message send rates. The announce interval can now be set from 1/8 second to 16 seconds, instead of 1 second to 8 seconds. The sync interval can now be set from 1/128 second to 16 seconds, instead of 1/2 second to 2 seconds.
- **Feature:** The change list viewer now supports grouping and sorting to improve readability. When a configuration is loaded from a file, a list of configuration changes appears for confirmation. The change list window now displays old and new values in columns and groups related settings to improve readability.
- **Feature:** Added a 'Restart Unit' button, which allows the clock to be remotely reinitiated in a manner similar to removing and reapplying power.
- **Feature:** (Fibre slave clocks only) The time quality information from the fibre IRIG-B input is now displayed on the IRIG-B input tab.
- **Improvement:** Factory reset button is not shown for Ethernet firmware older than 3.11r1. Ethernet firmware versions older than 3.11r1 contain a bug which can occasionally cause corrupted settings during a factory reset.
- **Bug Fix:** Tool no longer crashes if the USB cable is disconnected while it is in use.
- **Bug Fix:** P4 communications settings are no longer changed when the serial string selection is changed. This avoids unexpected changes occurring to the configuration.
- **Bug Fix:** Supervisor mode password change now works correctly.
- **Bug Fix:** Corrected description of NMEA RMC serial string to match the actual output of the serial string. The description previously included an extra comma between latitude degrees and minutes, which has now been removed.
- **Bug Fix:** Two-password DES now correctly uses the Privacy password instead of the Authentication password for encryption. Previously, this bug could make it impossible for a user to log in if two passwords are required, DES privacy is selected and the Privacy password is different from the Authentication password.

VERSION 4.0.4.0 (21/07/14)

- **Improvement:** Configuration tool will force new password to be different from current password.
- **Improvement:** Added a warning message when two passwords are used and the privacy password has changed from none to AES or DES. The new password is password.
- **Improvement:** Added warning message for incorrect password changes.
- **Improvement:** When leaving insecure mode a dialog box will remind the user of the default login details.
- **Improvement:** Supervisor mode change user password now accepted.
- **Improvement:** Delete group button added.
- **Improvement:** Add popup help for NTP tab.
- **Improvement:** PTP Translator support.
- **Bug Fix:** USB comms and test mode set time fixed (Introduced in 4.0.3.0)
- **Bug Fix:** Fixed a bug that could cause an error when a clock is unexpectedly removed from the network.

VERSION 4.0.3.0 (21/05/14)

- **Improvement:** TCG 01-G and TCG 02-G support
- **Improvement:** New DCF77 tab created to match the IRIG-B tabs. This is needed because the "Use UTC time" is a global DCF77 setting not output specific. The IRIG-B tab labels have been changed to remove the word "Stream" to make room.
- **Improvement:** The user "add" window now contains a reminder of the default password.
- **Improvement:** Active alarms are now visible on Clock tab when Notification access is disabled.
- **Improvement:** Notification labels - Historic changed to Historic SNMPV1 and Syslog (old) to Historic Syslog.
- **Improvement:** Add power alarms suppress check box.
- **Improvement:** Support for slave PTP Telecom profile.
- **Bug Fix:** SNMP public and private access selection now pointing to correct groups.
- **Bug Fix:** Time display on Clock tab now visible when users have no access to the Test access control group.